Carrier


Confíe en los Expertos



DUCTED FAN COIL UNIT

Efficiency and comfort enhancing fan coils
designed for years of reliable operation



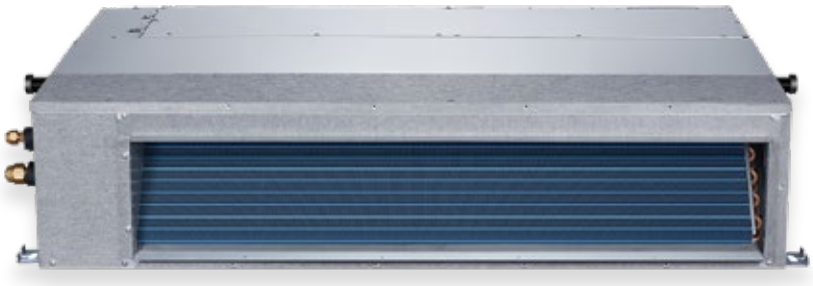

Product Model			42KUT036N-2	42KUT060N-2
Power supply	Voltage type		220-230V,1Ph	220-230V,1Ph
	Supply frequency		60Hz	60Hz
Indoor Fan Motor	Model		ZKFN-165-10-1L	ZKFN-400-8-1
	Speed(Hi/Mi/Lo)	r/min	1200/1100/1000	1060/970/880
	Capacitor	μF	/	/
	Capacitor class		/	/
	Insulation class		B	B
Indoor Coil	Number of rows		3	4
	Tube outside dia	mm	Φ5	Φ7
	Tube outside type		Inner groove tube	Inner groove tube
	Tube pitch(a)x row pitch(b)	mm	19.5*11.6	21x13.37
	Fin spacing	mm	1.2	1.4
	Fin type (code)		Hydrophilic aluminum	Hydrophilic aluminum
	Coil length x height x width	mm	825*351*34.8	1025*378*53.48
	Number of circuits		9	9
Dimension(W*D*H)	Body_Width(W)	mm	1000	1200
	Body_Depth(D)	mm	750	750
	Body_Height(H)	mm	245	300
Packing(W*D*H)	Packing_Width(W)	mm	1225	1425
	Packing_Depth(D)	mm	860	860
	Packing_Height(H)	mm	304	359
Net/Gross weight	Net weight	kg	31	43.1
	Gross weight	kg	36.3	49.3
Indoor side air flow(SH/Hi/Mi/Lo/Si)	Indoor side air flow(SH)	m3/h	1600	2850
	Indoor side air flow(Hi)	m3/h	1400	2500
	Indoor side air flow(Mi)	m3/h	1200	2100
	Indoor side air flow(Lo)	m3/h	900	1600
Drainage water pipe dia	Drainage water pipe dia		ODΦ25mm	ODΦ25mm
ESP	Rated	Pa	37	50
	Range	Pa	0-160	0-160
Loading quantity 20'GP/40'GP/40'HQ	Loading quantity_20'GP	set	70	62
	Loading quantity_40'GP	set	154	126
	Loading quantity_40'HQ	set	176	147

Carrier

Confíe en los Expertos

Ref: 042026

Carrier InterAmerica Corp. | T 305.805.450 | www.carrierlatam.com | @carrierlatam